

GLADSUM 东莞市欣永电子科技有限公司 規格標準書


COMPONENT SPECIFICATION

版次:第2版

NAME	Leaded EMI Ferrite Beads	COMPOSITE SPECIFICATION		1/2
	R6H Series	SPEC#	R6H Series	

Features


The R6H type wide-band chokes are mainly used in the high current carrying PC boards to filter the EMI from the outsides. Taping & Reel version are available for automatic insertion.

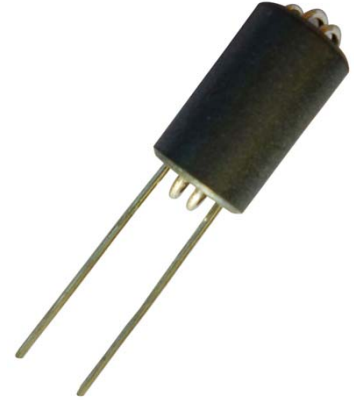

Applications

- R6H R8H Type Cores are used for Wide Band Choke. The impedance is substantially resistive and constant.
- Used in PC boards to filter the EMI from the outsides.
- For radio and TVs, small motor ignition devices, computer disk drivers and communication equipments, etc.

◆ Dimensions (mm)

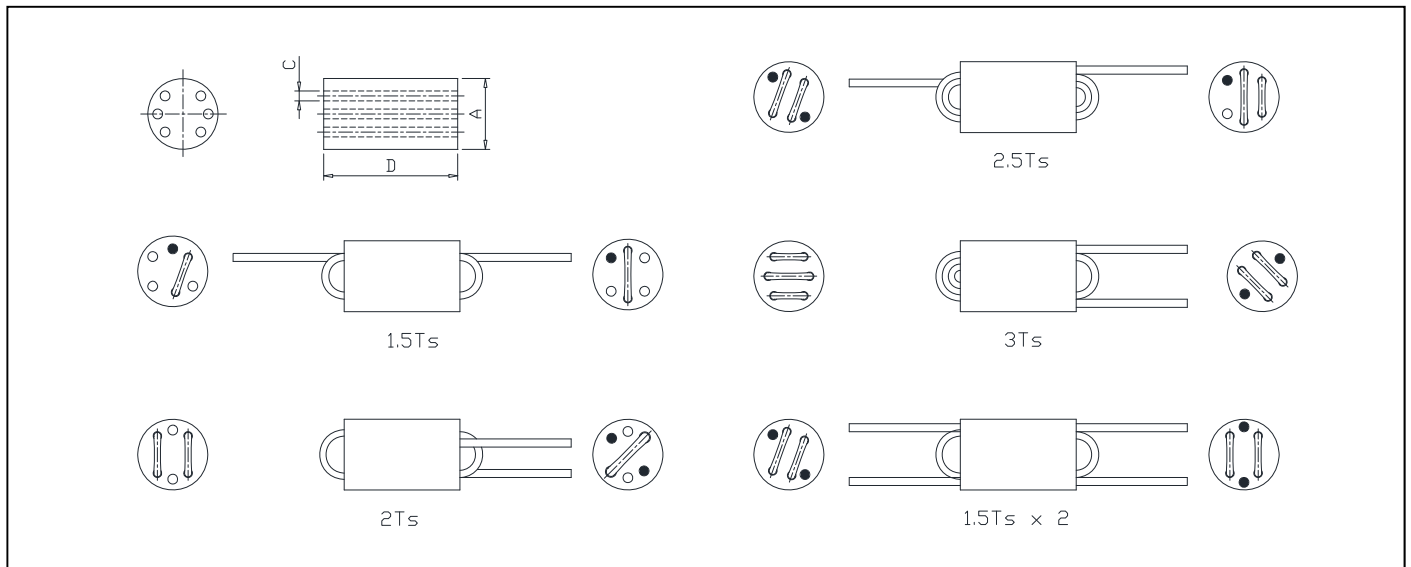

HISTORY	DATE	REVISION	SIGN.	SIGN.
PLANNED BY	CHECKED BY	APPROVED BY		
table zhu	SLEKEY	Liwei		

GLADSUM 东莞市欣永电子科技有限公司 规格标准书

COMPONENT SPECIFICATION

版次:第2版

NAME	Leaded EMI Ferrite Beads	COMPOSITE SPECIFICATION		2/2
	R6H Series	SPEC#	R6H Series	

◆ Specification

Part Name	IMPEDANCE @25MHz (Ω)	IMPEDANCE @100MHz (Ω)	DIMENSIONS		Number of Turns	Fig.
			A	B		
R6H-1.5T-TCW	390TYP	460TYP	6.0±0.25	10±0.50	1.5	1
R6H-2T-TCW	510TYP	580TYP	6.0±0.25	10±0.50	2.0	2
R6H-2.5T-TCW	680TYP	690TYP	6.0±0.25	10±0.50	2.5	3
R6H-3T-TCW	750TYP	860TYP	6.0±0.25	10±0.50	3.0	4
R6H-1.5*2T-TCW	340TYP	450TYP	6.0±0.25	10±0.50	2*1.5	5

◆ Impedance & Frequency

